
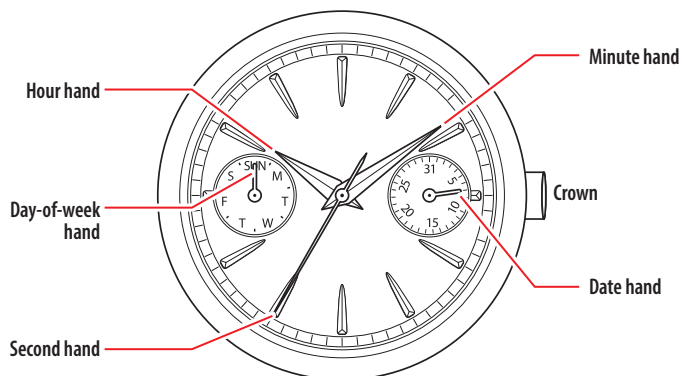



- This watch is solar-powered. Expose the dial to light and use it sufficiently charged.
- To see details of charging time, specifications and operations, refer to the instruction manual:  8635 instruction manual

Component identification



- Actual appearance may differ from the illustrations.
- The crown has two positions when pulling it out.



Setting the day of week and time

- The day-of-week hand moves synchronously with the hour and minute hands.
- 1. Pull the crown out to position 2 when the second hand points 0 second.**
The second hand stops.
 - 2. Rotate the crown clockwise to set the day-of-week hand.**
 - Day of week indication changes while the hour hand indicates around 0:00 AM - 5:00 AM.
 - 3. Rotate the crown to set the time.**
 - Change of the day of week indication shows it just became AM. Take care the time set is AM or PM.
 - Move the hands 4 or 5 minutes forward and move them back to the right time to set the time more precisely.
 - 4. Push the crown in to position 0 in accordance with a reliable time source to finish the procedure.**

Setting the date

- Do not adjust the date between 9:00 PM and 1:00 AM. Otherwise, the date indication may change incorrectly thereafter.
 - Date indication adjustment is required on the first days of March, May, July, October and December.
- 1. Pull the crown out to position 1.**
 - 2. Rotate the crown counterclockwise to set the date hand.**
 - 3. Push the crown in to position 0 to finish the procedure.**